



Box Patent Application Commissioner of Patents and Trademarks Washington, DC 20231



I hereby cortify that this correspondence to being deposited with the Duited States Part of Coming as first diese mail, or as Express Well addition to be in provided before in an environment of the Express Well addition to be in Commissioner of Paragrap and Tradeguarks. Westington, C.S.



NEW APPLICATION TRANSMITTAL

PATENT

Transmitted herewith for filing is the patent application of inventors:

Ingo DABERKOW, Elsa-Brandström Str. 15, D-48351 Everswinkel, Germany, a citizen of Germany
Manfred SCHIERJOTT, Ostring 17, D-45711 Datteln, Germany, a citizen of Germany
Jürgen TÜMPNER, Philippistr.13, D-48149 Münster, Germany, a citizen of Germany

For (title):

CAMERA SYSTEM FOR A TRANSMISSION ELECTRON MICROSCOPE

1.	Type	of	App	lica	tion
----	------	----	-----	------	------

- ☑ Utility
- □ Design
- □ Plant
- ✓ Original
- □ Divisional
- □ Continuation
- ☐ Continuation-in-part (CIP)

2. Benefit of Prior US Application(s) (35 USC 120) or foreign priority (35 USC 119)

- The new application being transmitted claims the benefit of a prior US application.
- Foreign priority claimed (see ¶9)

3. Papers Enclosed Required For Filing Date Under 37 CFR 1.53(b) (Uti.) or 37 CFR 1.153 (Des.)

- Pages of specification (7)
- Pages of claims (2)
- Pages of Abstract (1)
- ✓ Sheets of Drawing (1)
 - Formal
 - □ Informal

4.	Additional			
		Preliminary Amendment		
		Information Disclosure Statement		
		PTO-1449		
		Citations (none)		
		Declara	ation of Biological Deposit	
		Submiss	sion of "Sequence Listing," computer-readable copy and/or amendment pertaining thereto	
			echnology invention containing nucleotide and/or amino-acid sequence	
			ization of Attorney(s) to accept and follow instructions from Representative	
		Other		
5	Declaration	n or Oatl	h	
٥.		Enclose		
	_		executed by	
			Inventor(s)	
			legal representative of inventor(s). 37 CFR 1.42 or 1.43	
			joint inventor or person showing a proprietary interest on behalf of inventor who	
		-	refused to sign or could not be reached	
			this is the petition required by 37 CFR 1.47 and the statement required by 37	
			CFR 1.47 is also attached	
	⊄	Not En	closed	
		Ø	Application is made by a person authorized under 37 CFR 1.41(c) on behalf of all the	
			above-named inventor(s).	
			Showing that the filing is authorized.	
6.	Inventorshi	p Statem	nent	
		_	ip for all the claims in this application is:	
	Ø	The sar		
		Not the	same. An explanation, including the ownership of the various claims at the time the last	
			l invention was made	
			bmitted.	
		□ will b	pe submitted.	
7.	Language			
7.	Z	English		
		non-En		
	_		ached translation is a verified translation. 37 CFR 1.52(d).	
	_	mo atta	inter transfer to a totalog transferrous of the state (w).	
8.	Assignment			
	Ø		ignment of the invention to SOFT IMAGING SYSTEM GMBH	
			is attached.	
		ø	will follow	

9. Certified Copy

Certified copies of applications

Country Germany Germany

Number 19704723.8 19752724.8

Date 7 February 1997 28 November 1997

from which priority is claimed

- is(are) attached.
- Ø will follow.

10. Fee calculation

A. Utility application Ø

CLAIMS AS FILED

	No. Filed	Base No.	No. Extra	Rate	Basic fee
		20	0	\$22.00	\$790.00 \$0.00
Total claims	8 : 1	20 3	0 0	\$82.00	\$0.00
Independent claims Mult. dep. claims	No	n/a	n/a	\$270.00	\$0.00
□ An □ Fe	e for extra clain	eling multiply deperms is not being paid the Calculation	ndent claims enclosed I at this time.	i.	\$790.00
	Design applic 0037 CFR 1.1 Filing fe				\$00.00
	Plant applica				\$00.00

11. Small Entity Statement(s)

Verified Statement(s) that this is a filing by a small entity under 37 CFR 1.9 and 1.27 is(are) attached

Filing fee calculation (50% of A, B, or C above)

12. Request for International-Type Search (37 CFR 1.104(d))

Filing fee calculation

Please prepare an international-type search report for this application at the time when national examination on the merits takes place.

13.	Fee Paym	Not enclosed.	
	_	No filing fee is to be paid at this time.	
		Enclosed.	¢ ለ ለለ
		basic filing fee petition fee for filing by other than all the inventors or person	\$0.00
		petition fee for filing by other than all the inventors or person on behalf of the inventor where inventor refused to sign or could not be reached	
			\$0.00
		☐ for processing an application with a specification in a non- English language	
			\$0.00
		□ processing and retention fee	\$0.00
		□ fee for international-type search report	\$0.00
		Total fees enclosed	\$0.00
1.1	Mathad a	of Payment of Fees	
17,		Check in the amount of \$0.00	
		Charge Account 18-2025 for \$0.00. A duplicate of this form is attached.	
15.	Authoriza	ation to Charge Additional Fees	
		The Commissioner is hereby authorized to charge the following additional for	ees by this paper and
		during the entire pendency of this application to account 18-2025.	
		□ 37 CFR 1.16(a), (f), or (g) (filing fees)	
		□ 37 CFR 1.16(b), (c), or (d) (extra claims)	
		37 CFR 1.16(e) (surcharge for filing the basic filing fee and/or dec	laration on a date
		later than the filing date of the application) 37 CFR 1.17 (application processing fees)	
		□ 37 CFR 1.17 (application processing fees) □ 37 CFR 1.18 (issue fee at or before mailing of Notice of Allowance	nursuant to 37 CFR
		1.31(b))	parsault to 37 CTR
16.		ons As To Overpayment	
		credit account 18-2025	
		refund	
		The Firm	of Karl F. Poss P.C.
			7. /
14.	January 19	98	
			Subno, reg. no. 19,752
		Heroere1	74000, 10g. no. 19,732

Customer Number 000535

5676 Riverdale Avenue Box 900 Riverdale (Bronx), NY 10471-0900 Tel: (718) 884-6600

Fax: (718) 601-1099

je

5

CAMERA SYSTEM FOR A TRANSMISSION ELECTRON MICROSCOPE

SPECIFICATION

FIELD OF THE INVENTION

Our present invention relates to a transmission electron microscope and, more particularly, to a camera system for registering, in optical form, a photon image converted from the electron image of the transmission electron microscope (TEM).

BACKGROUND OF THE INVENTION

A transmission electron microscope, in addition to its evacuated housing and the electron beam generator thereof, includes a system for forming an electron beam image of the object, article or material which is subjected to the electron beam microscope and for outputting the electron image. In addition, the transmission electron microscope can include a luminescent screen which can be inserted into the electron beam path for transforming the electron image into a photon image, an optical element for rerouting the photon image through a right angle to the electron beam, and a camera which can be connected to the optical element by an optical lens system so that the camera can register optically the photon image corresponding to the electron image.

20

25

In a camera system of this type (see United States Patent 5,517,033) the optical lens system in the camera are rigid with the projection chamber and only the luminescent screen and the rerouting optical device need be movable within the projection chamber. While this does give rise to a very simple mechanical system, it has the drawback that positioning of the luminescent screen and the rerouting element relative to the lens optics and the camera cannot be reproducible to less tan a fraction of a millimeter and thus the camera system cannot be used for high resolution image formation.

In another camera system for an electron transmission microscope, the luminescent screen is connected with a CCD camera by a fiber optics system (United States Patent 4,739,399). Here the luminescent screen, the fiber optics and the CCD camera are provided as a single rigid structural unit within the projection camera and both the luminescent screen and the CCD camera directly adjoin the optical fiber ends. The drawback of this system is that the image sensor of the CCD camera must have the same size as the luminescent screen and thus is prohibitively expensive.

OBJECTS OF THE INVENTION

It is, therefore, the principal object of the present invention to provide a camera system for a transmission electron microscope which can produce a high resolution image without the drawbacks of the earlier systems as outlined above.

20

Another object of the invention is to provide an improved camera system for a transmission electron microscope in which relative movement between the luminescent screen and the optical rerouting element, on the one hand, and the optical lens system and the camera, on the other hand, is not a problem.

It is also an object of this invention to provide a high resolution camera system for a transmission electron microscope which can use a camera, especially a charge-coupled device (CCD) camera, of smaller size than the luminescent screen.

SUMMARY OF THE INVENTION

These objects and others which will become apparent hereinafter by providing in a transmission electron microscope, a luminescent screen and rerouting element within the housing of the transmission electron microscope, a camera outside the housing of the transmission electron microscope and a structure for rigidly connecting the luminescent screen, the rerouting element, the optical lens system and the camera so that these elements together with the structure form a unit which is shiftable relative to the electron beam and to the housing.

According to the invention, high resolution images can be obtained because with the system of the invention it is no longer necessary to use large format cost-intensive camera sensors and there is no loss of resolution because of a lack of precision in repositioning the need to precisely position the

20

25

luminescent screen and rerouting element on the one hand and the optical lens system and camera on the other hand.

It has been found that the system of the invention also facilitates variation or selection of the image ratio or scale of reproduction and thus optimum matching of the resolution of the luminescent screen, which is dependent upon the high voltage applied thereto, to the resolution of the camera. Furthermore, by the use of an appropriate ancillary lens, the sensitivity can be significantly increased. It has been found that, with such lens, correction of spherical aberration is possible to eliminate spherical aberration effect which may be contributed by the optical characteristics of the rerouting element and the vacuum window required in the projection chamber wall which is straddled by the camera system of the invention.

A transmission electron microscope of the invention can then comprise:

a housing;

an electron beam generator on the housing directing an electron beam along a transmission electron microscopy path within the housing;

a luminescent screen in the housing transverse to the path and insertable in the path for transforming an electron image into a photon image;

an optical element juxtaposed with the luminescent screen for rerouting the photon image through a right angle;

Anceste . It is se

20

a camera outside the housing in optical alignment with the optical element for registering the photon image;

a focussing lens optics spaced from the optical element and the camera and in optical alignment with the optical element and the camera; and

a structure fixing the luminescent screen, the optical element, the camera and the focussing lens optics together for joint movement relative to the path. Preferably the rerouting element is a prism, although a mirror can also be used. The camera preferably is a high resolution CCD camera and the shifting of the unit can be effected by a pneumatic unit acting upon the slide formed by the structure.

BRIEF DESCRIPTION OF THE DRAWING

The above and other objects, features, and advantages will become more readily apparent from the following description, reference being made to the accompanying drawing in which:

FIG. 1 is a highly diagrammatic side elevational view of a portion of an electron transmission microscope provided with the camera system of the invention;

FIG. 2 is a side elevational view in section of a detail of the system of FIG. 1; and

FIG. 3 is a plan view of the camera portion of the system seen in FIG. 2, also in section.

20

25

SPECIFIC DESCRIPTION

In FIG. 1, a transmission electron microscope is shown which has an electron beam 1 in a projection chamber 2 directed onto a viewing luminescent screen 3. The electron beam generator and the balance of the electron microscope has been represented at 20 in FIG. 1. The projection chamber is evacuated by a suction pump 21 and a camera system 22 can be shiftable by a pneumatic actuator 23 to slide that unit along a guide 24 and on bars 11 relative to the electron beam 1.

More particularly the camera system 22 can comprise a luminescent screen 4 which can be shifted into the beam or withdrawn therefrom, below which, a rerouting optical element 5 in the form of a prism is provided. The camera system includes an optical lens arrangement 6, 7 of the focusing type in optical alignment with the prism 5 along the optical axis 25, a camera 8 which is preferably a high resolution CCD camera.

The assembly of the luminescent screen 4, the prism 5, the lens system 6, 7 and the camera 8, is fixed by a rigid structure shown at 9, 10, 11 which is shiftable by the pneumatic actuator 23 relative to the housing 2 of the electron microscope.

In the active position of the camera system, the luminescent screen 4 is in the path of the electron beam 1 and transforms the electron image into a photon image. The prism 5 reroutes that photon image at a right angle to the path of the electron beam 1 and the image is focused in the camera 8 by the lens optics 6, 7.

The luminescent screen 4, the rerouting element 5 and a part 6 of the lens optics, as well as part of the structure 9, 10, 11, is located within the electron microscope, i.e. within the housing 2. The remaining part 7 of the lens optics and the CCD camera are located outside the electron microscope. The two parts of the lens optics are separated by a vacuum window 12 in the wall of the evacuated projection chamber the window 12 passing the optical image to the camera. The bars 11 of the structural unit 9, 10, 11 pass slidably through the wall of the housing 2. The elements connected to these bars include a support 9 for the luminescent screen and the prism, and a support 10 for the camera.

Adjustment of the image ratio can be effected upon the original mount of the camera system by appropriate positioning of the lens 6 and 7 on the bars 11 or on a housing 26 connected to the camera support 10. Spherical aberration is eliminated by the selection and design of, said, lens 7.

We	cl	ai	m	
----	----	----	---	--

1	 A transmission electron microscope comprising:
2	a housing;
3	an electron beam generator on said housing directing an
4	electron beam along a transmission electron microscopy path
5	within said housing;
6	a luminescent screen in said housing transverse to said
7	path and insertable in said path for transforming an electron
8	image into a photon image;
	an optical element juxtaposed with said luminescent
10	screen for rerouting said photon image through a right angle;
10 11 11 12	a camera outside said housing in optical alignment with
12	said optical element for registering said photon image;
13	a focussing lens optics spaced from said optical
14	element and said camera and in optical alignment with said
15	optical element and said camera; and
16	a structure fixing said luminescent screen, said
1 7	optical element, said camera and said focussing lens optics
18	together for joint movement relative to said path.

- 2. The transmission electron microscope defined in
 claim 1 wherein said optical element is a prism.
- 3. The transmission electron microscope defined in
 claim 2 wherein said camera is a high resolution CCD camera.

3

4


5

- 4. The transmission electron microscope defined in claim 3 wherein said structure forms a pneumatically actuated
- 3 slide.
- 5. The transmission electron microscope defined in claim 4 wherein said structure comprises at least two rods extending through a wall of said housing, said wall being formed with a vacuum window, said focusing lens optics including lenses on opposite sides of said window.
 - 6. The transmission electron microscope defined in claim 1 wherein said camera is a high resolution CCD camera.
 - 7. The transmission electron microscope defined in claim 1 wherein said structure forms a pneumatically actuated slide.
 - 8. The transmission electron microscope defined in claim 1 wherein said structure comprises at least two rods extending through a wall of said housing, said wall being formed with a vacuum window, said focusing lens optics including lenses on opposite sides of said window.

ge-

ABSTRACT OF THE DISCLOSURE

A camera system for a transmission electron microscope includes a luminescent screen and prism within the transmission electron microscope evacuated housing and a camera outside the housing. An optical lens system between the prism and the camera can be provided on opposite sides of a wall of the housing have a vacuum window. The luminescent screen, prism, optical lens system and camera have a common structure fixedly connecting them together and enabling them to shift relative to the electron beam via a pneumatic effector.

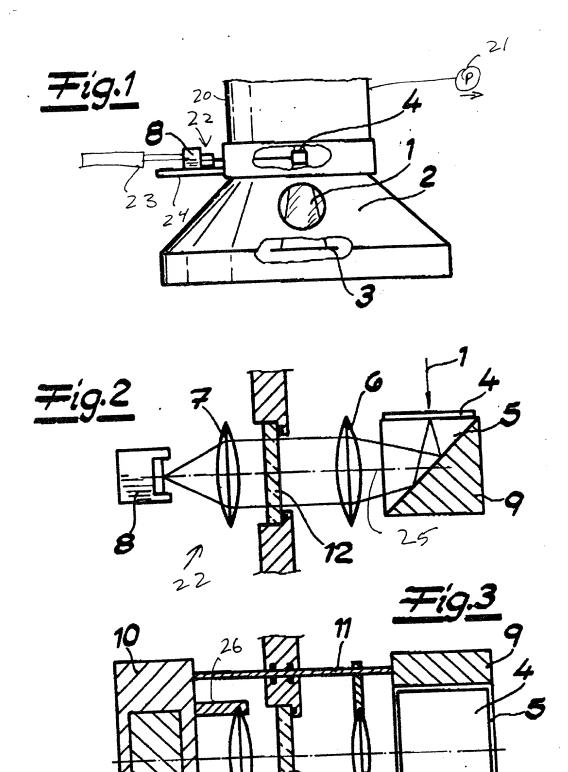

United States Patent & Trademark Office

Office of Initial Patent Examination - Scanning Division



Application deficiencies found during scanning:

l.	. Application papers are not suitable for scanning and are not in compliance with a second
	1.52 because:
	\square All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 3-1/27x 117
	Pages do not meet these requirements.
	Papers are not flexible, strong, smooth, non-shiny, durable, and white.
	Papers are not typewritten or mechanically printed in permanent ink on one side.
	Papers contain improper margins. Each sheet must have a left margin of at least
	2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
	☐ Papers contain hand lettering.
2.	Drawings are not in compliance and were not scanned because:
	The drawings or copy of drawings are not suitable for electronic reproduction.
	All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm x
	or 8-1/2" x 11".
	Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin
	at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3	Page(s) are not of sufficient clarity, contrast and quality for
٠.	Page(s) are not of sufficient clarity, contrast and quality for electronic reproduction.
	Clean one reproduction.
4.	Page(s) are missing.
5	OTHER: No Declaration